

FEATURE

- Superior high-power performance with thick film technology
- High reliability.
- RoHS complaint.
- Compatible with Reflow and Wave soldering
- Applications:
 - Adapters
 - Back-light circuit
 - Camera
 - Industrial Equipment
 - etc.

MANUFACTURER PART NO.

For example: PR1206J100KT5G00-PR1206 ±5% 100KΩ T/R-5000

Series	Size	Tol.	Value	PKG	SPQ	Feature	TCR
2 codes	4 codes	1 code	2~5 codes	1 code	1 code	1 code	2 codes
PR	1206	J	100K	T	5	G	00
High Power Thick Film Chip Resistors	0402 0603 0805 1206 1210 2010 2512	F=±1% J=±5%	0R01 ^① =0.01Ω 0R1=0.1Ω 1R=1Ω 4R7=4.7Ω 4K7 ^② =4.7KΩ 100K=100KΩ 4M7 ^③ =4.7MΩ	T=T/R ^④	4=4K 5=5K A=10K	G=Std. S=P.C. ^⑤	00=Refer to table as below.


Note: ① R=Radix, 10⁰, Ω ② K=Kilo, 10³, KΩ ③ M=Mega, 10⁶, MΩ
 ④ T/R=Taping in reel package type ⑤ P.C.=Personal and Customized.

CHARACTERISTIC

Item	Rated Power	MWV ^①	MOV ^②	Tolerance	Resistance Range	Jumper	
						Max Value	Max. Current
PR0402	1/10W	50V	100V	±1%, ±5%	1Ω-10M	10mΩ	3.0A
PR0603	1/5W	75V	150V	±1%, ±5%	100mΩ-10M	8mΩ	5.0A
PR0805	1/3W	150V	300V	±1%, ±5%	10mΩ-10M	5mΩ	6.0A
PR1206	1/2W	200V	400V	±1%, ±5%	10mΩ-10M	5mΩ	10A
PR1210	3/4W	200V	500V	±1%, ±5%	100mΩ-10M	4mΩ	12A
PR2010	1W	200V	500V	±1%, ±5%	10mΩ-10M	5mΩ	12A
PR2512	2W	300V	500V	±1%, ±5%	10mΩ-10M	5mΩ	16A

Note: ① MWV: Max. Working Voltage ② MOV: Max. Overload Voltage ③ MOC: Max. Overload Current

POWER DERATING CURVE

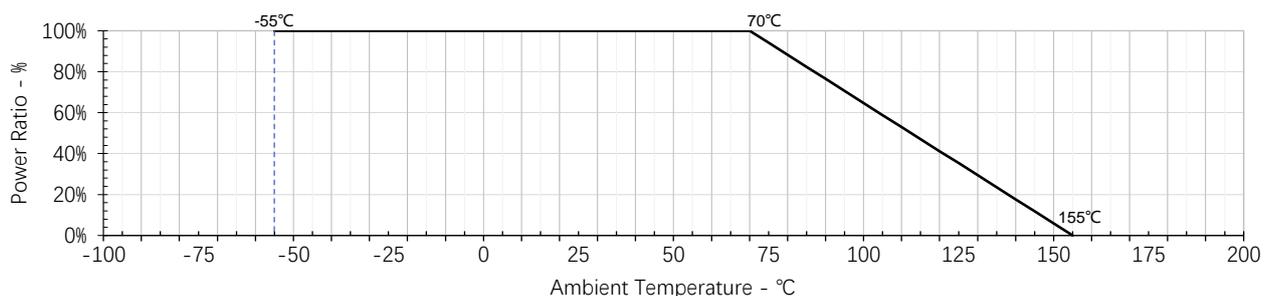

Note: Operating Temperature Range: -55°C ~ +155°C

RATED VOLTAGE

Resistors should have a Rated Voltage DC or AC corresponding to Rated Power which can be calculated by formula as below.

The Rated Voltage of certain resistance value should be the calculated result or Max. Working Voltage of product series whichever less.

Formula:

$$E = \sqrt{P \times R}$$

E=Rated voltage(V)

P=Rated power(W)

R=Nominal resistance(Ω)

DIMENSIONS

Unit: mm

Figure	Type	L	W	H	A	B
	PR0402	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
	PR0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20
	PR0805	2.00±0.15	1.25±0.15	0.55±0.10	0.40±0.20	0.40±0.20
	PR1206	3.10±0.10	1.55±0.15	0.55±0.10	0.45±0.20	0.45±0.20
	PR1210	3.10±0.10	2.60±0.20	0.55±0.10	0.50±0.25	0.50±0.20
	PR2010	5.00±0.10	2.50±0.20	0.55±0.10	0.60±0.25	0.50±0.20
	PR2512	6.35±0.10	3.20±0.20	0.55±0.10	0.60±0.25	0.50±0.20

RELIABILITY

Item	Test Method	Acceptable criterion
Temperature Coefficient of Resistance (T.C.R.)	$TCR(PPM/^{\circ}C) = \frac{(R_2 - R_1)}{R_1 \times (T_2 - T_1)} \times 10^6$ <p> R_1 = Value in room temperature R_2 = Value in test temperature -55°C or +125°C T_1 = Room temperature T_2 = Test temperature -55°C or +125°C Reference: IEC 60115-1 6.2 </p>	<p>0402:</p> <p>1Ω ≤ R ≤ 10Ω: ±400 PPM/°C 10Ω < R ≤ 100Ω: ±200 PPM/°C 100Ω < R ≤ 10M: ±100 PPM/°C</p> <p>0603:</p> <p>100mΩ ≤ R < 200mΩ: ±200 PPM/°C 200mΩ ≤ R ≤ 10M: ±100 PPM/°C</p> <p>0805:</p> <p>10mΩ ≤ R ≤ 15mΩ: ±800 PPM/°C 15mΩ < R ≤ 25mΩ: ±600 PPM/°C 25mΩ < R ≤ 50mΩ: ±400 PPM/°C 50mΩ < R < 100mΩ: ±200 PPM/°C 100mΩ ≤ R ≤ 10M: ±100 PPM/°C</p> <p>1206:</p> <p>10mΩ ≤ R < 15mΩ: ±700 PPM/°C 15mΩ ≤ R < 30mΩ: ±400 PPM/°C 30mΩ ≤ R < 50mΩ: ±300 PPM/°C 50mΩ ≤ R < 100mΩ: ±150 PPM/°C 100mΩ ≤ R ≤ 10M: ±100 PPM/°C</p> <p>1210:</p> <p>±100 PPM/°C</p> <p>2010:</p> <p>10mΩ ≤ R < 15mΩ: 0~+800 PPM/°C 15mΩ ≤ R < 50mΩ: 0~+600 PPM/°C 50mΩ ≤ R < 10M: ±100 PPM/°C</p> <p>2512:</p> <p>10mΩ ≤ R < 20mΩ: 0~+800 PPM/°C 20mΩ ≤ R ≤ 50mΩ: 0~+400 PPM/°C 50mΩ < R ≤ 10M: ±100 PPM/°C</p>

PR Series

High Power Thick Film Chip Resistors

Version. B




Item	Test Method	Acceptable criterion								
Insulation Resistance	Using the parallel clamp method: 100±15V _{DC} voltage is applied between the electrode and the substrate within 60 seconds. Test the insulation resistance between the terminal and the back of the part. Reference: IEC 60115-1 12.1.3.5	≥ 10 ⁹ Ω								
Dielectric Withstanding Voltage	An alternating current with an effective value of the maximum overload voltage is applied between the electrode and the substrate at a rate of approximately 100V/s Pressure, maintain 60s±5 sec. The test voltage reference to the DWV in characteristics. Reference: IEC 60115-1 12.2.4	Test to confirm if the presence of current or arc breakdown by ≥10uA								
Short Time Over Load	Apply 2.5 times of rated voltage or maximum overload voltage whichever is less for 5 seconds Reference: IEC 60115-1 8.1.4.2	1% series: ΔR/R=±1.0% 5% series: ΔR/R=±2.0%								
Intermittent Overload	Put it in the thermostat, apply 2.5 times of rated voltage, 1 second ON, 25 seconds OFF, count 10000 ⁺⁴⁰⁰ times, take it out and stand for 60 minutes, then measure the change rate of resistance value. Reference: IEC 60115-1 8.4.4	ΔR/R=±5.0%								
Resistance to Solvent	Immerse in isopropanol solvent at room temperature (23±5°C) for 5min, wipe 10 times with a hard toothbrush, repeat 3 times, take out and blow dry for examination Reference: IEC 60115-1 11.3.2 method1	No obvious damage, peeling, swelling phenomenon								
Solderability	Pretreatment: dry heat 155°C, 4 hrs. or PCT aging for 4 hrs. (equivalent), after take out, stand at room temperature for 2 hrs. Test method: 1. Dip the resistance in a tin furnace at 245±3°C for 3 seconds, then take it out and observe the solder area under a microscope; 2. Reflow soldering test, Peak Temperature: 235°C, T=40±5 sec. Reference: IEC 60115-1 11.1.4.3	1. Solder coverage over 95% 2. No welding refusal phenomenon, side soldering height is greater than 1/2 of the height								
Leaching	Pretreatment: dry heat 155°C, 4 hrs. or PCT aging for 4 hrs. (equivalent), after take out, stand at room temperature for 2 hrs. dip in a tin furnace at 260 ⁺⁵ °C for 30 ⁺¹ seconds, remove and wash. Observe the area of solder under a microscope Reference: IEC-60068-2-58	No electrode is eroded to expose the substrate phenomenon								
Resistance to Soldering Heat	The tested resistor be immersed into molten solder of 260 ⁺⁵ °C for 10 seconds. Then the resistor is left in the room for 1 hr., then measure the change rate of resistance value Reference: IEC 60115-1 11.2.4.3	ΔR/R=±1.0%								
Thermal Shock	High and low temperature test is carried out according to the upper and lower limits of the application temperature of the parts, the residence time of the upper and lower limits of the temperature is 30min, and the temperature conversion time is less than 30s, lasting 500 cycles Reference: IEC 60115-1 10.1.4	ΔR/R=±1.0%								
Solder Joint Endurance Test	The SMD resistance was welded to the test board and bent with the standard pressure block. After standing for 60s under the corresponding deformation condition, the change rate of resistance value of the part was tested. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Size</td> <td style="width: 30%;">0402, 0603, 0805</td> <td style="width: 30%;">0201, 1206, 1210</td> <td style="width: 25%;">2010, 2512</td> </tr> <tr> <td>Depth</td> <td>5mm</td> <td>3mm</td> <td>2mm</td> </tr> </table> Reference: IEC 60115-1 9.8.4	Size	0402, 0603, 0805	0201, 1206, 1210	2010, 2512	Depth	5mm	3mm	2mm	ΔR/R=±1.0%
Size	0402, 0603, 0805	0201, 1206, 1210	2010, 2512							
Depth	5mm	3mm	2mm							
Resistance to Dry Heat	Put it in an oven at 155±5°C for 1000 ⁺⁴⁸ hrs., take it out and let it stand for more than 1hr., then measure the change rate of resistance value Reference: IEC 60115-1 7.3	1% series: ΔR/R=±1.0% 5% series: ΔR/R=±3.0%								
Loading Life in Moisture	Place it in a constant temperature and humidity box with 40±2°C and 90~95%RH and apply the rated voltage, on for 90 minutes and off for 30 minutes, a total of 1000 hours. Take it out and stand for 60 minutes, and then measure the change rate Reference: IEC 60115-1 10.4	1% series: ΔR/R=±1.0% 5% series: ΔR/R=±3.0%								
Load Life	Put in an oven at 70±2°C, apply rated voltage, 90 min ON, 30 min OFF, 1000 HRS, take out and stand for more than 60 min, then measure the resistance change rate. Reference: IEC 60115-1 7.1	1% series: ΔR/R=±1.0% 5% series: ΔR/R=±3.0%								

This document is subject to change without notice. The products described herein, and this document are subject to specific disclaimers, set forth at GiantOhm official website, <http://www.giantohm.com/download/cid/22.html>

Item	Test Method	Acceptable criterion												
Low temperature load test	-55°C no load for 1 hour, rated voltage/current for 45 minutes, unpowered for 15 minutes, return to room temperature, take out and stand for 24 hours, then measure the change rate of resistance value. Reference: IEC 60115-1 10.2.4	1% series: $\Delta R/R = \pm 1.0\%$ 5% series: $\Delta R/R = \pm 2.0\%$												
Shear force test	Weld the part to the PCB. Apply the corresponding test stress from the side of the part with the test terminal for 10s. Check the appearance of the welded end of the part under the stress condition <table border="1" style="margin-left: 20px;"> <tr> <td>Size</td> <td>0201</td> <td>0402, 0603</td> <td>0805</td> <td>1206, 1210</td> <td>2010, 2512</td> </tr> <tr> <td>Test force</td> <td>2N</td> <td>5N</td> <td>9N</td> <td>25N</td> <td>45N</td> </tr> </table> Reference: IEC 60115-1 9.7	Size	0201	0402, 0603	0805	1206, 1210	2010, 2512	Test force	2N	5N	9N	25N	45N	Without obvious damage.
Size	0201	0402, 0603	0805	1206, 1210	2010, 2512									
Test force	2N	5N	9N	25N	45N									


SOLDERING

Lead Free IR Reflow Soldering Profile

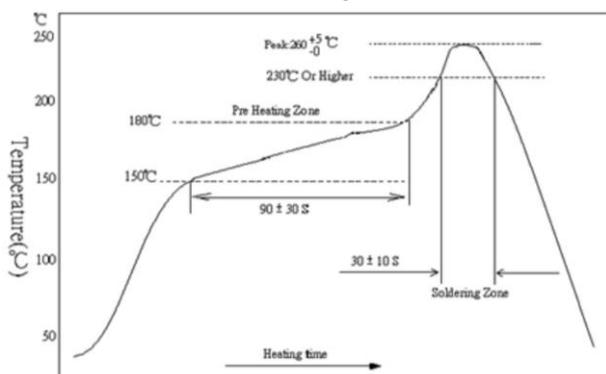


- Top temperature should be under 260 ± 10 °C ,10 sec.
- Reference: J-STD-020D

Lead Free Double-Wave Soldering Profile

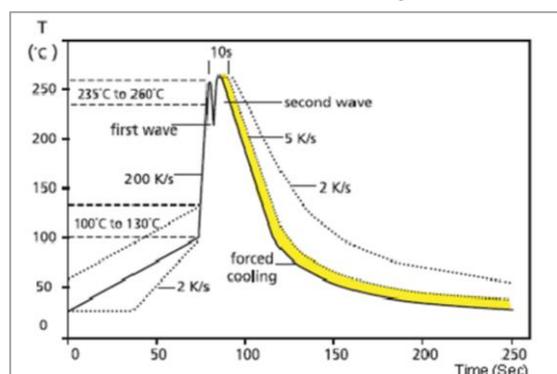

- Suitable for 0603 above size products
- 350 ± 10 °C within 3 Sec. if soldering iron.

SOLDERING PAD

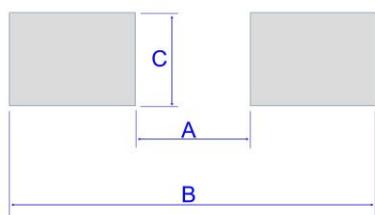

Type	A	B	C
PR0402	0.5	1.5	0.6
PR0603	0.8	2.1	0.9
PR0805	1.2	3.0	1.3
PR1206	2.2	4.2	1.6
PR1210	2.2	4.2	2.8
PR2010	3.5	6.1	2.8
PR2512	3.8	8.0	3.5

WORKING ENVIRONMENT

If user intends to use products in special environments or states (including but not limited to the following), it is necessary to approve special characteristics and reliability for the following or other application environments.

- High temperature.
- Near the sea, or corrosive gas, such as Cl_2 , H_2S , NH_3 , SO_2 and NO_2 , etc.
- Unverified liquids, such as water, oil, chemical or organic solvent.
- Unverified resin or paint to cover products.
- Products should be washed with water soluble cleaner even if non cleaning flux.

STORAGE / CARRY CONDITIONS

- A. Temperature: $25\pm 5^{\circ}\text{C}$.
- B. Humidity: $60\pm 15\%\text{RH}$.
- C. Storage life: 2 years. FIFO.
- D. Please hold box correct orientation when storing and carrying. It is strictly prohibited to fall or squeeze the box, otherwise the product electrode or body may be damaged.

LEGAL DISCLAIMER

GiantOhm and its distributors or agents (hereinafter referred to as GiantOhm) shall not bear any responsibility for any error, inaccuracy or incompleteness contained in any product related information (including but not limited to product specifications, data, pictures, and charts). GiantOhm may change, revise, or improve product related information at any time without prior notice.

GiantOhm makes no commitment, guarantee for the suitability of its products for special purposes or the continuous production of any of its products. To the maximum extent permitted by law, GiantOhm does not assume any of the following responsibilities:

- A. All liabilities arising from the application or use of any GiantOhm's products.
- B. All liabilities, including but not limited to the loss of profits or direct damage, indirect damage, special damage, punitive damage, derivative damage or incidental damage caused by or related to GiantOhm's products.
- C. All implied warranties, including fitness for a particular purpose, non-infringement, and merchantability.

GiantOhm defines this product as a general consumer electronic purpose, which is not applicable to any medical lifesaving or life-sustaining equipment, nor to any application that may cause casualties in case of failure of GiantOhm's products.

All technical suggestions on product application provided by GiantOhm are provided free of charge. GiantOhm assumes no obligation and responsibility for adopting such technical suggestions and available results, and all risks of adopting such suggestions shall be borne by the buyer. All risks and responsibilities arising from the buyer's use of GiantOhm's products in combination with other materials or raw materials, or in any combination in its manufacturing process, shall be borne by the buyer, regardless of any oral or written technical instructions, suggestions or other requirements given by GiantOhm for the use of the products.

The information provided above is only to explain the product specifications. If the product is not changed, GiantOhm has all the rights to modify the above contents without prior notice, and the product change will be notified to the customer by ECN.

